FIG.1

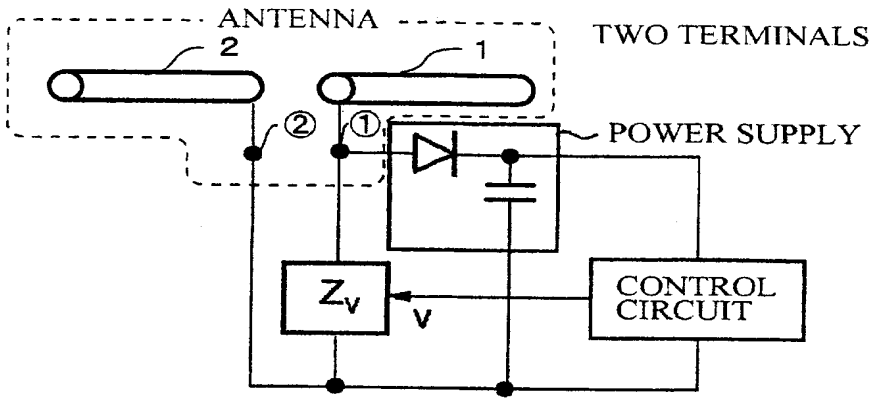

PRIOR ART

FIG.2

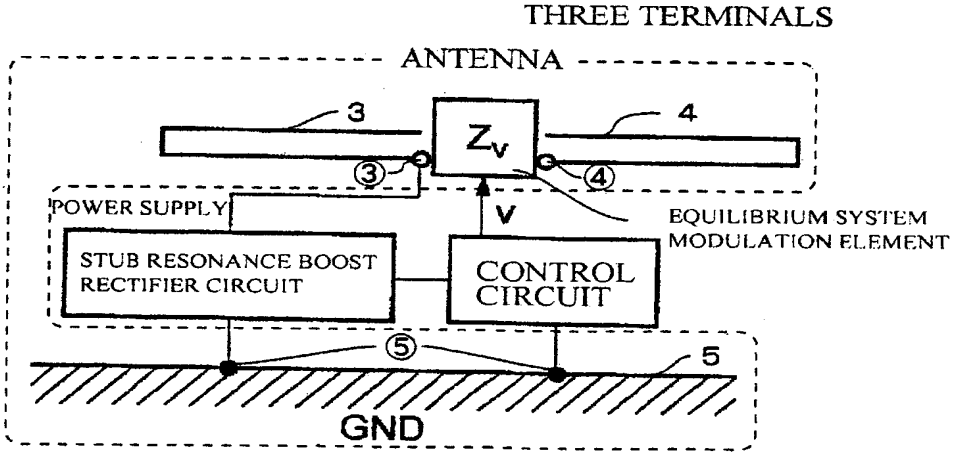

PRESENT INVENTION

FIG. 3

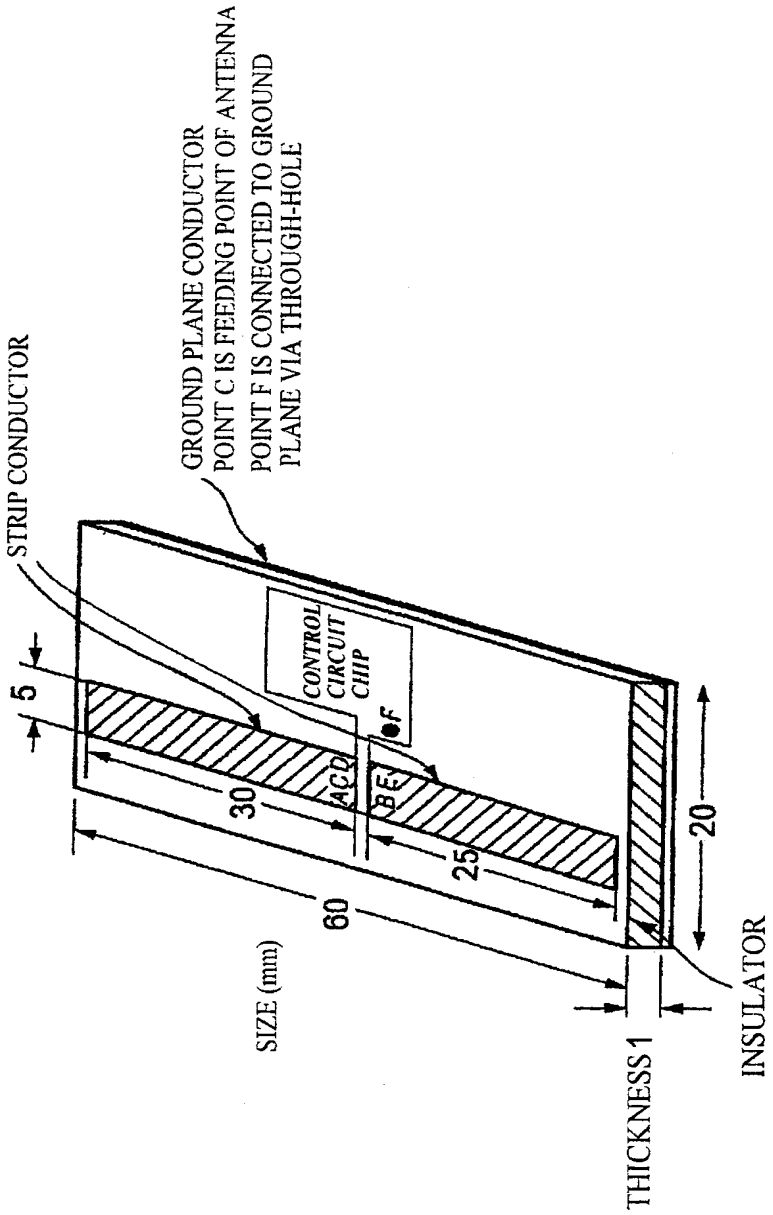
STRIP CONDUCTOR
GROUND PLANE CONDUCTOR
POINT C IS FEEDING POINT OF ANTENNA
POINT F IS CONNECTED TO GROUND PLANE VIA THROUGH-HOLE
CONTROL CIRCUIT CHIP
C
F
5
30
25
60
20
SIZE (mm)
THICKNESS 1
INSULATOR

FIG. 4

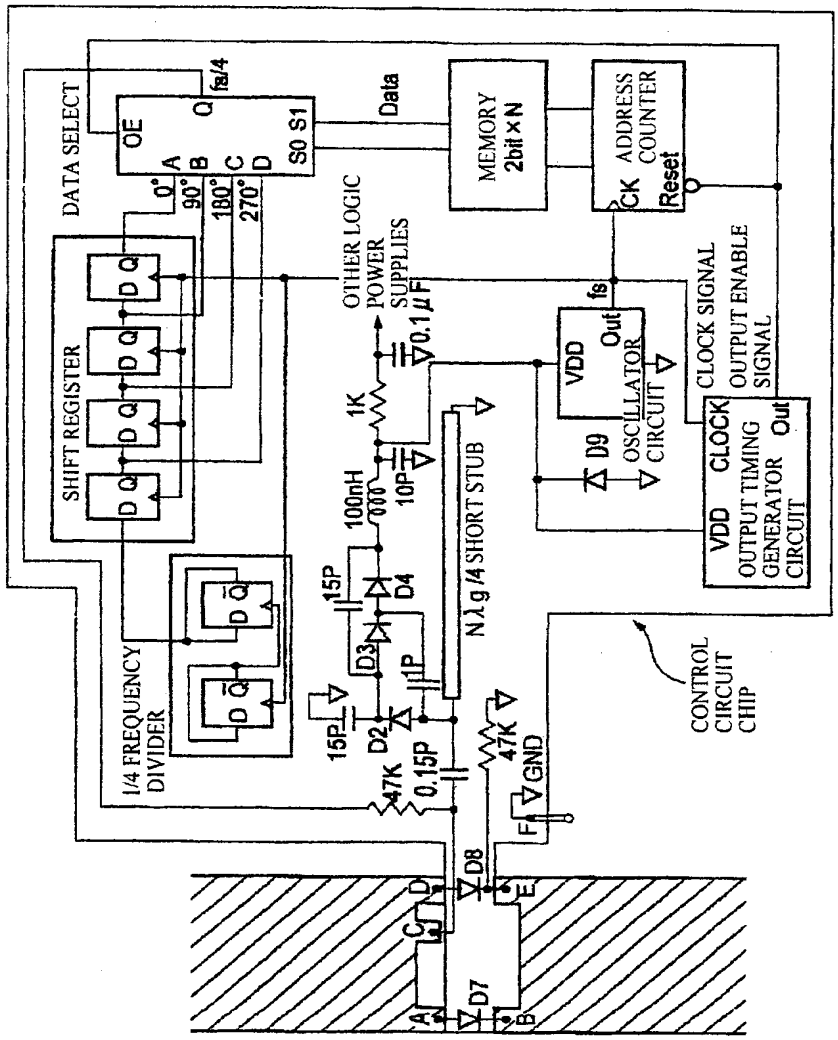
DATA SELECT
OE
fs/4
Q
S0 S1
Data
0°
90°
180°
270°
A
B
C
D
MEMORY
2bit×N
ADDRESS
COUNTER
CK
Reset
SHIFT REGISTER
D Q
OTHER LOGIC
POWER
SUPPLIES
0.1μF
1K
100nH
10P
15P
D4
D3
D2
1P
15P
47K
0.15P
Nλg/4 SHORT STUB
VDD
Out
fs
OSCILLATOR
CIRCUIT
D9
CLOCK SIGNAL
OUTPUT ENABLE
SIGNAL
VDD
CLOCK
Out
OUTPUT TIMING
GENERATOR
CIRCUIT
1/4 FREQUENCY
DIVIDER
CONTROL
CIRCUIT
CHIP
47K
GND
F
D8
D7
A
B
C
D
E

FIG. 5

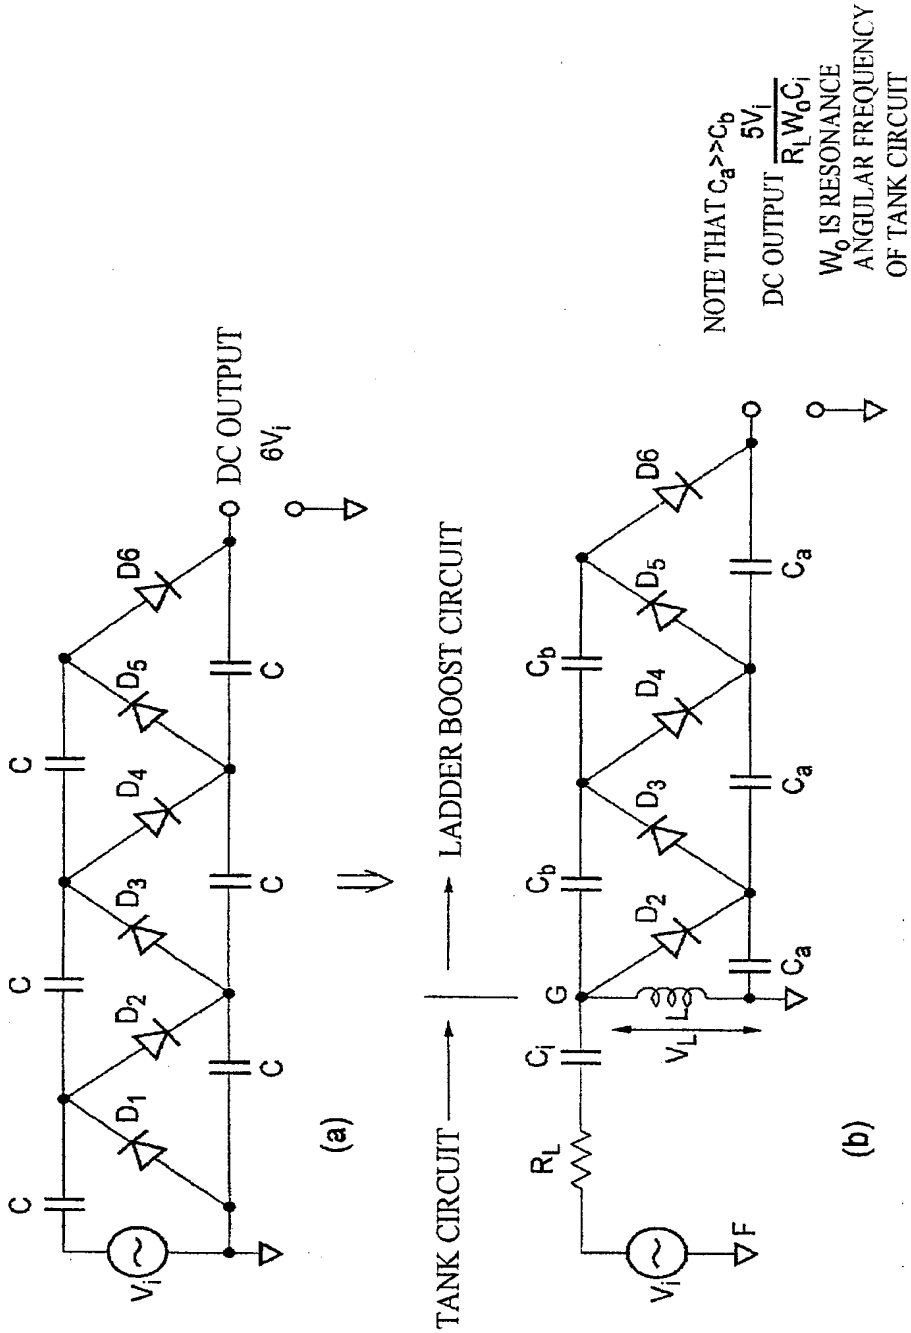
DC OUTPUT
6Vi
D1
D2
D3
D4
D5
D6
C
Vi
(a)
LADDER BOOST CIRCUIT
TANK CIRCUIT
Ci
RL
Cb
Ca
G
F
VL
L
NOTE THAT Ca>>Cb
DC OUTPUT 5Vi / RLW0Ci
W0 IS RESONANCE ANGULAR FREQUENCY OF TANK CIRCUIT
(b)

FIG.6

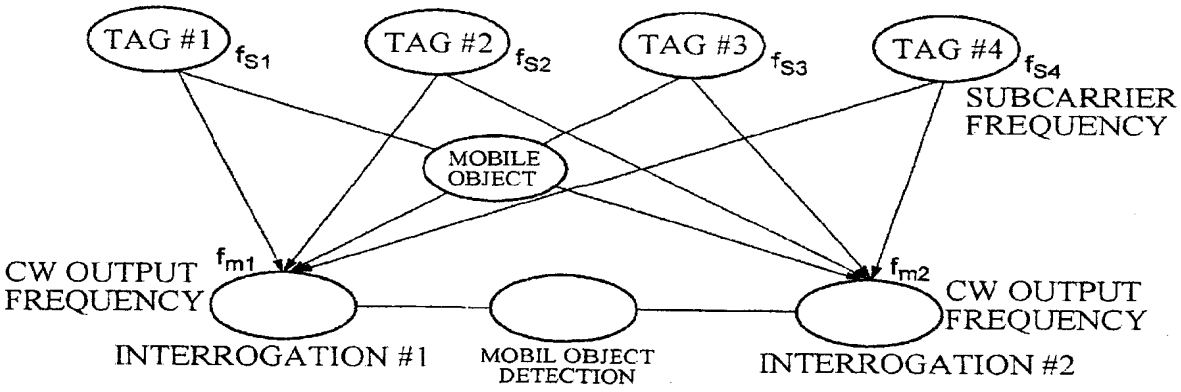

PRESENCE OR ABSENCE OF TAG RESPONSE SIGNAL

		TAG NUMBER			
		#1	#2	#3	#4
INTERROGATION NUMBER	#1	○	○	×	○
	#2	×	○	○	○

FIG.7

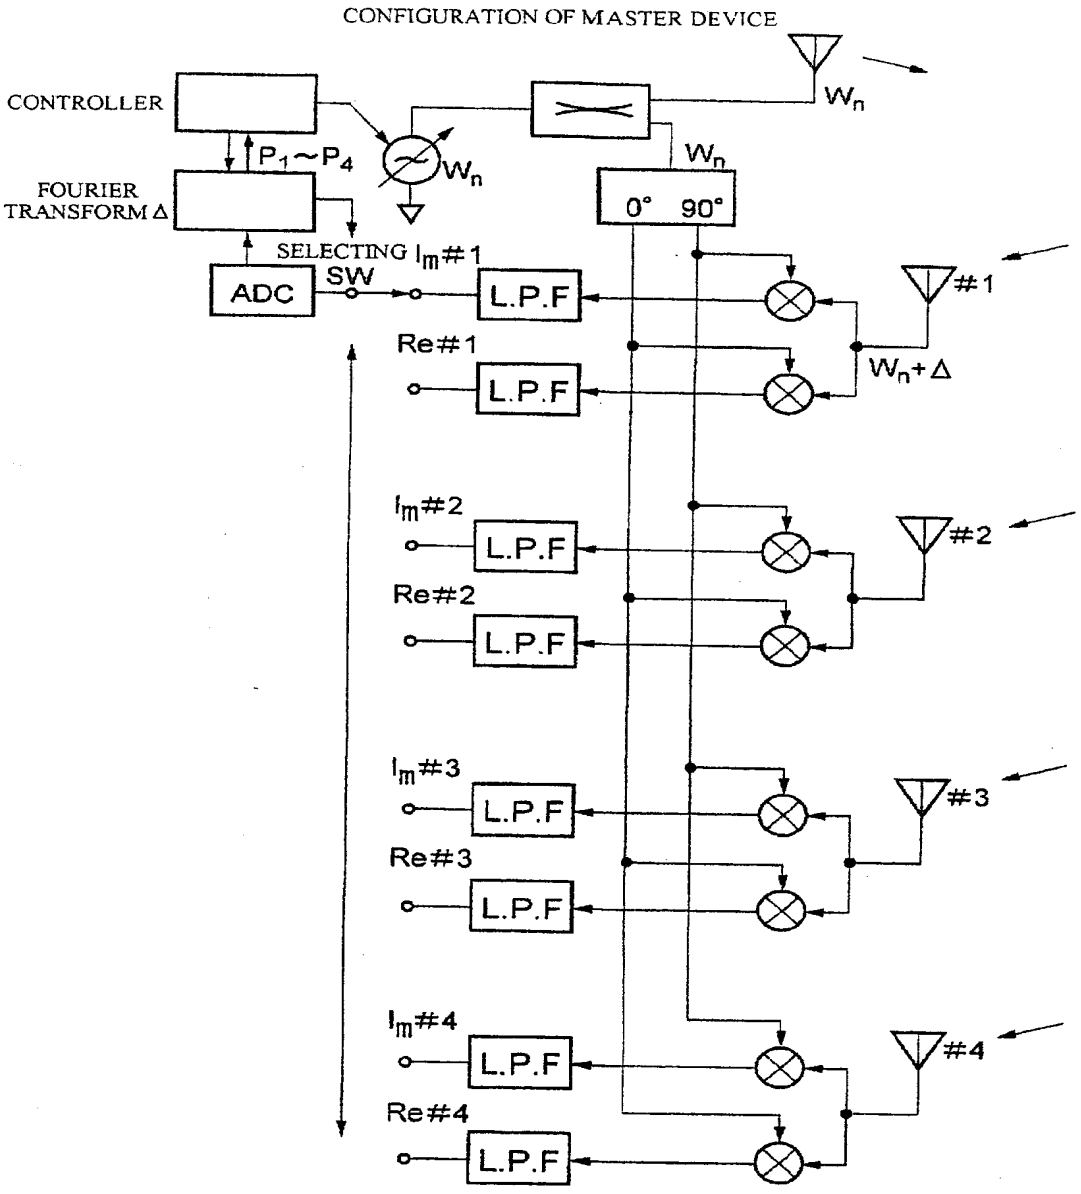
CONFIGURATION OF MASTER DEVICE
CONTROLLER
FOURIER TRANSFORM Δ
P1~P4
Wn
Wn
0° 90°
SELECTING SW
ADC
Im#1
L.P.F
Re#1
L.P.F
#1
Wn+Δ
Im#2
L.P.F
Re#2
L.P.F
#2
Im#3
L.P.F
Re#3
L.P.F
#3
Im#4
L.P.F
Re#4
L.P.F
#4

FIG.8

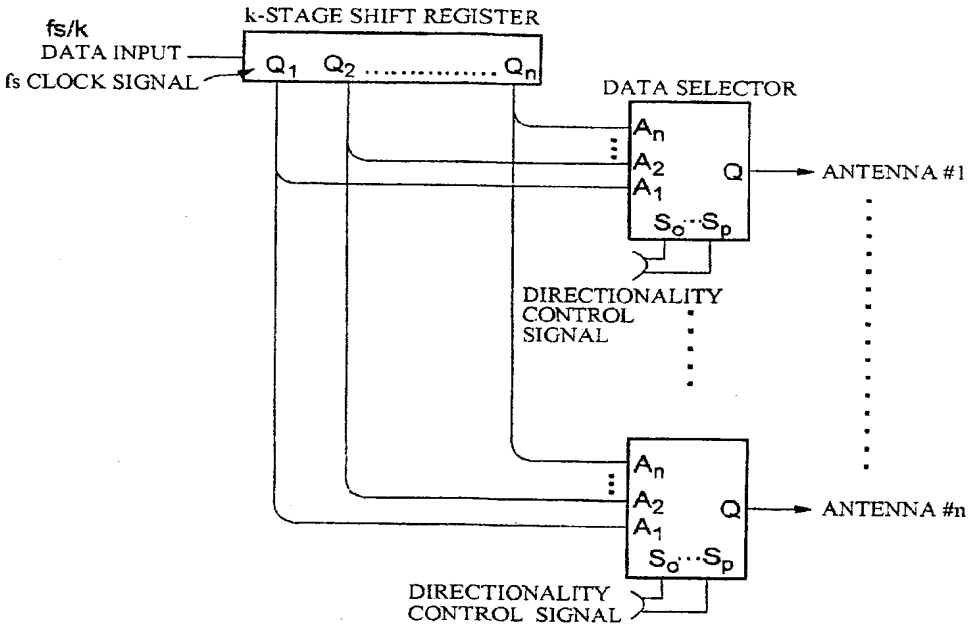
fs/k
DATA INPUT
fs CLOCK SIGNAL
k-STAGE SHIFT REGISTER
Q1 Q2 ..... Qn
DATA SELECTOR
An
A2
A1
Q
So···Sp
ANTENNA #1
DIRECTIONALITY CONTROL SIGNAL
ANTENNA #n
DIRECTIONALITY CONTROL SIGNAL

FIG.9

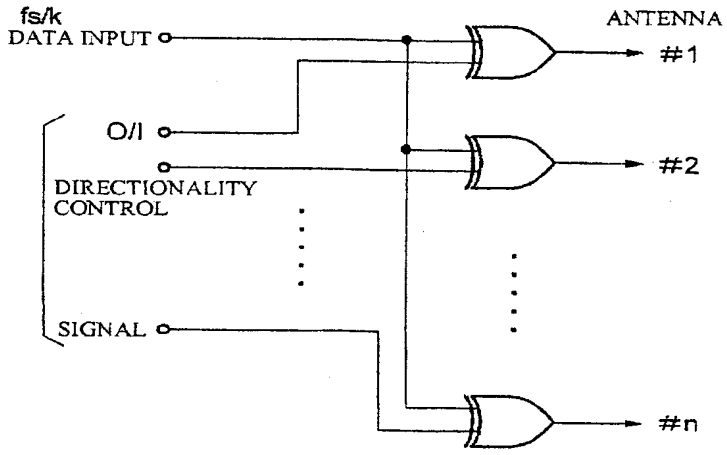
fs/k
DATA INPUT
O/I
DIRECTIONALITY CONTROL
SIGNAL
ANTENNA
#1
#2
#n

FIG. 10

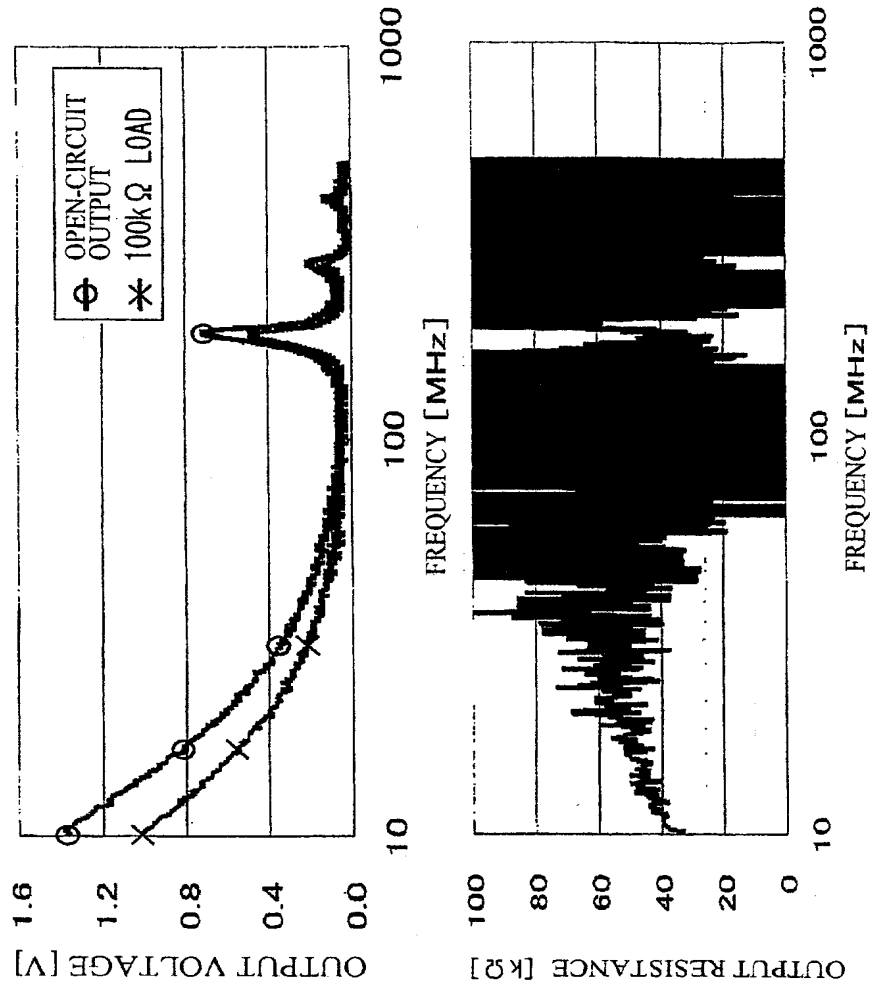
OPEN-CIRCUIT OUTPUT
100kΩ LOAD
OUTPUT VOLTAGE [V]
1.6
1.2
0.8
0.4
0.0
10
100
1000
FREQUENCY [MHz]
OUTPUT RESISTANCE [kΩ]
100
80
60
40
20
0
10
100
1000
FREQUENCY [MHz]

FIG. 11

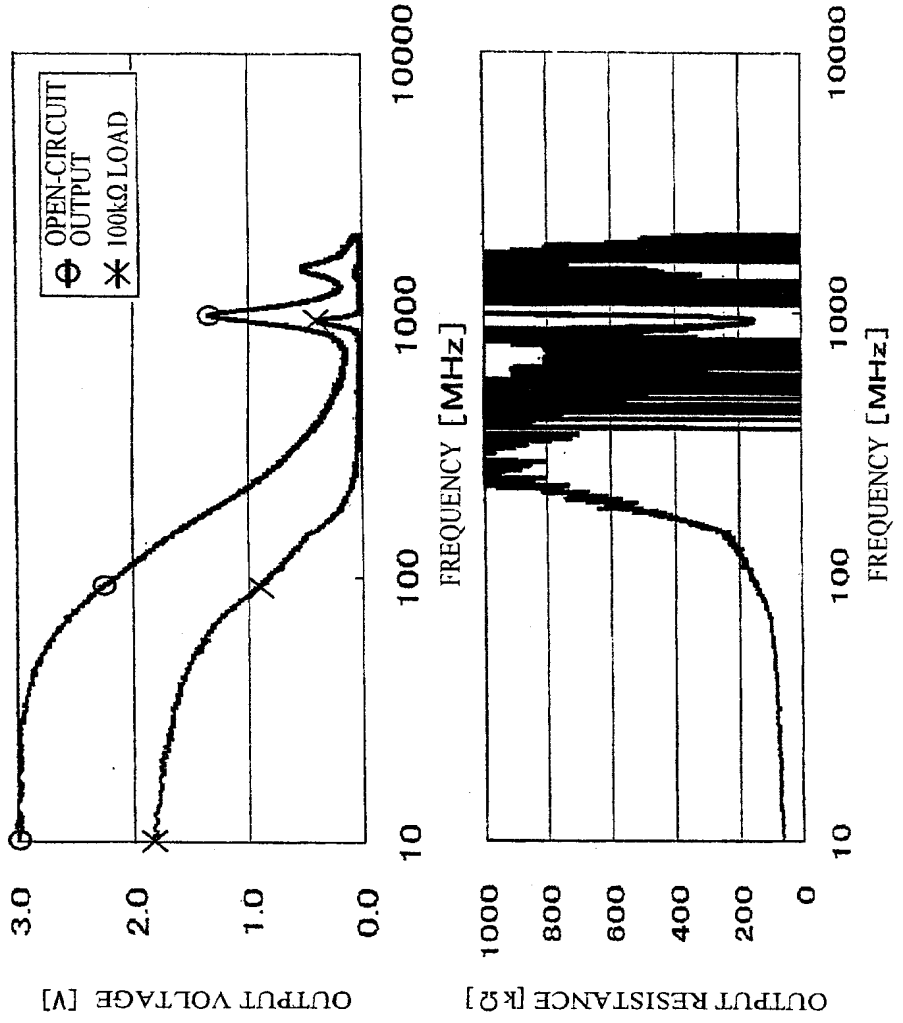
OPEN-CIRCUIT OUTPUT
100kΩ LOAD
OUTPUT VOLTAGE [V]
3.0
2.0
1.0
0.0
10
100
1000
10000
FREQUENCY [MHz]
OUTPUT RESISTANCE [kΩ]
1000
800
600
400
200
0
10
100
1000
10000
FREQUENCY [MHz]

FIG. 12

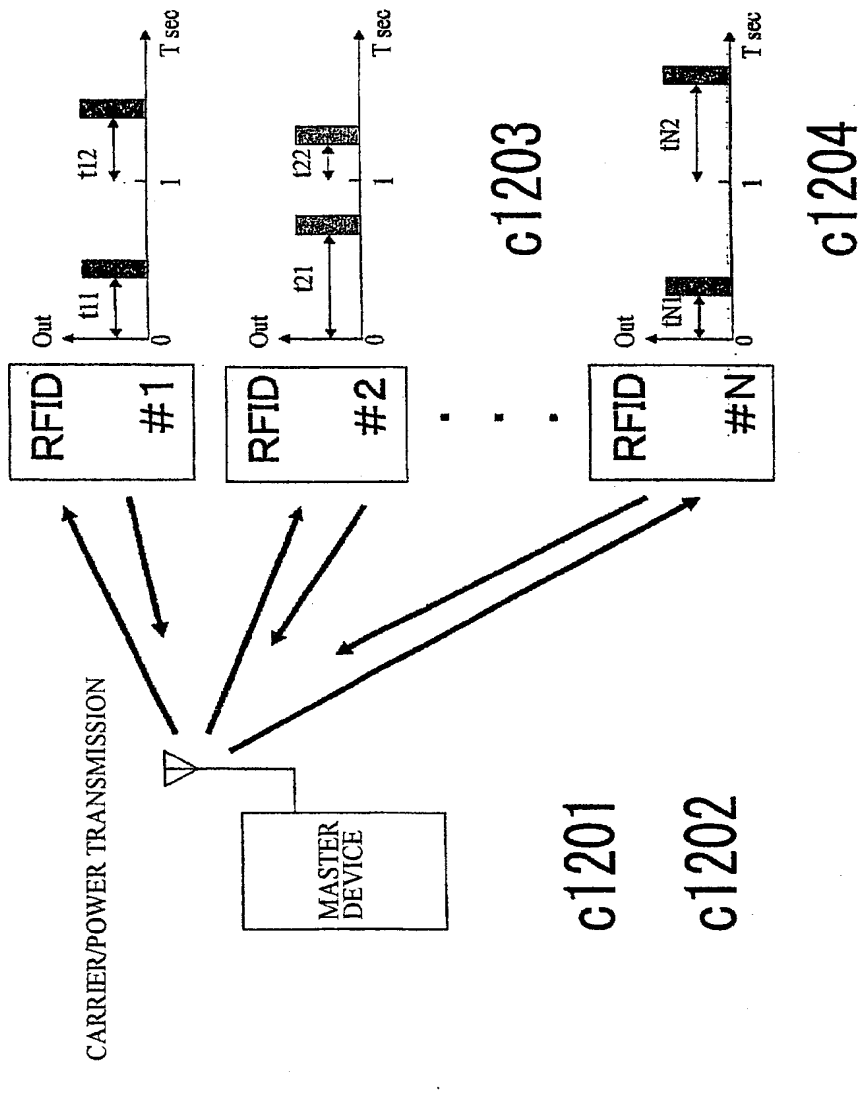
RFID #1
RFID #2
RFID #N
Out
t11
t12
t21
t22
tN1
tN2
0
1
T sec
MASTER DEVICE
CARRIER/POWER TRANSMISSION
c1201
c1202
c1203
c1204

FIG. 13

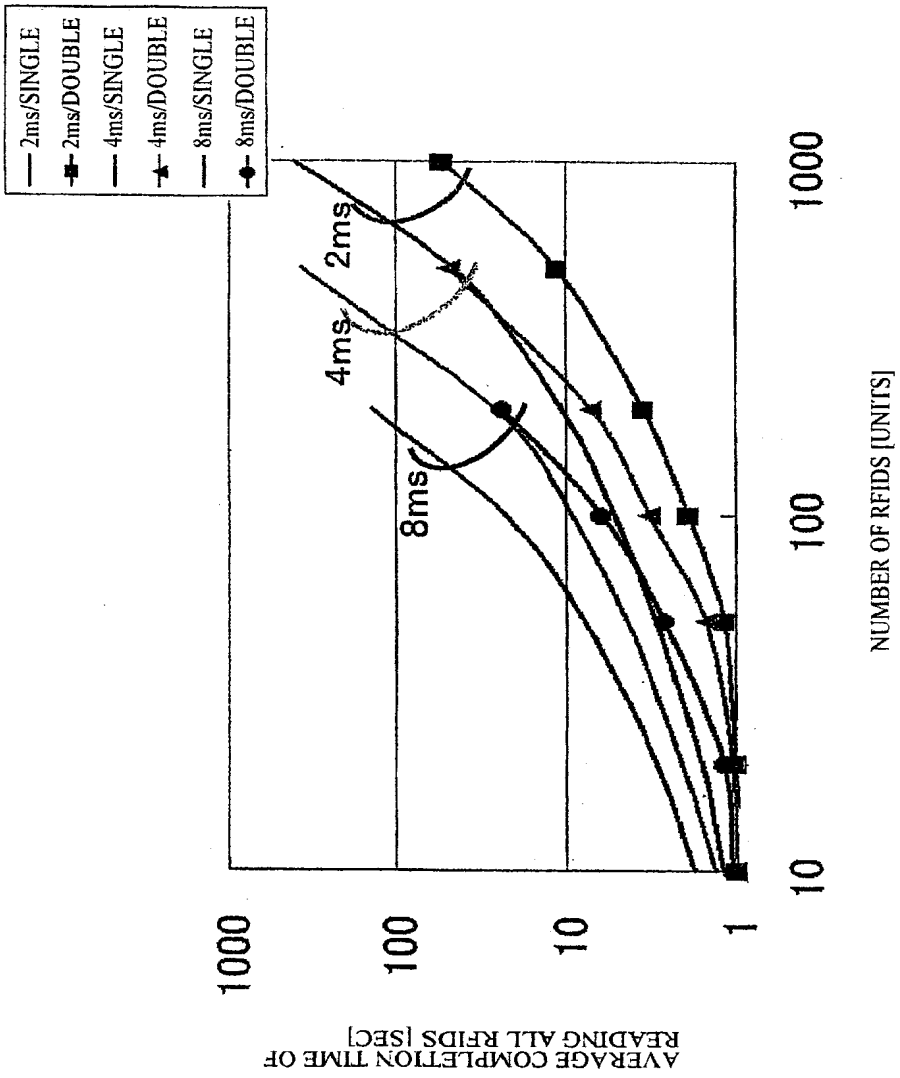
2ms/SINGLE
2ms/DOUBLE
4ms/SINGLE
4ms/DOUBLE
8ms/SINGLE
8ms/DOUBLE
2ms
4ms
8ms
1000
100
10
1
10
100
1000
AVERAGE COMPLETION TIME OF READING ALL RFIDS [SEC]
NUMBER OF RFIDS [UNITS]

FIG. 14

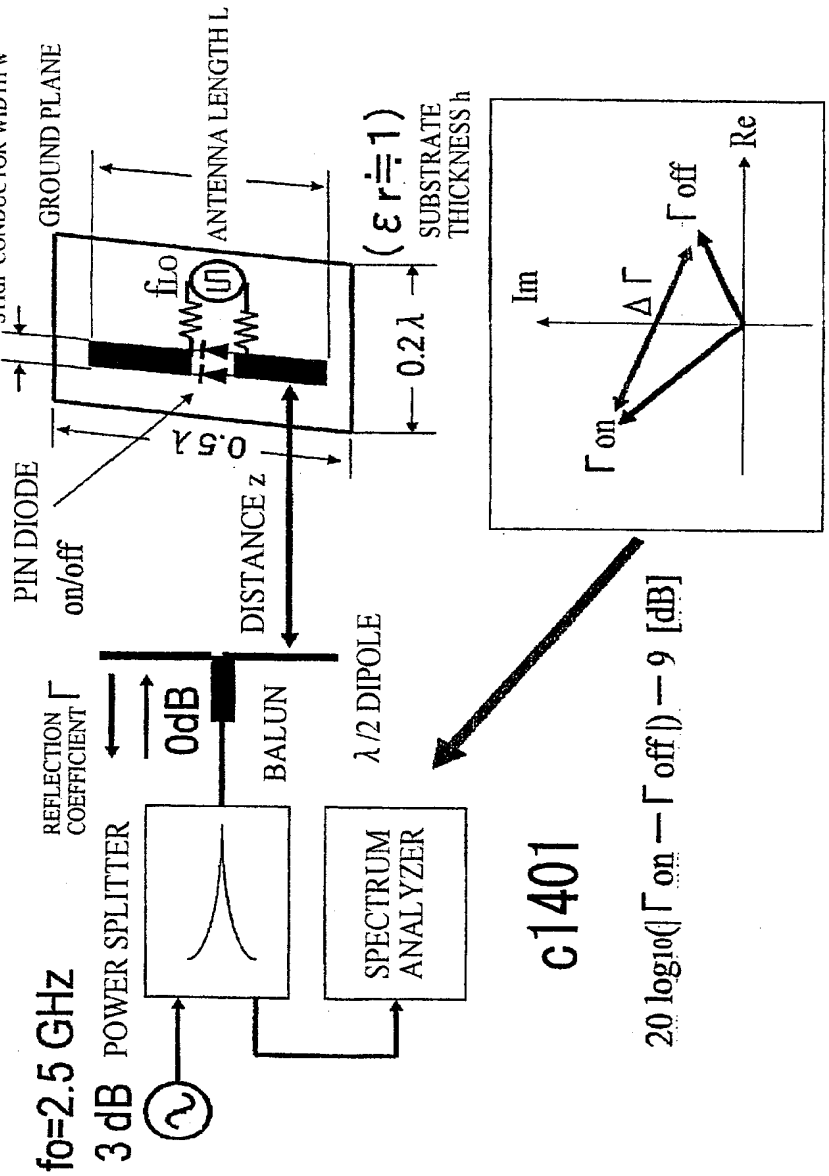
STRIP CONDUCTOR WIDTH w
GROUND PLANE
ANTENNA LENGTH L
SUBSTRATE THICKNESS h
(ε r ≒ 1)
fLO
0.2λ
0.5λ
PIN DIODE
on/off
DISTANCE z
REFLECTION COEFFICIENT Γ
0dB
BALUN
λ/2 DIPOLE
fo=2.5 GHz
3 dB POWER SPLITTER
SPECTRUM ANALYZER
Im
Re
Δ Γ
Γ off
Γ on
c1401
20 log10(| Γ on − Γ off |) − 9 [dB]

FIG. 15

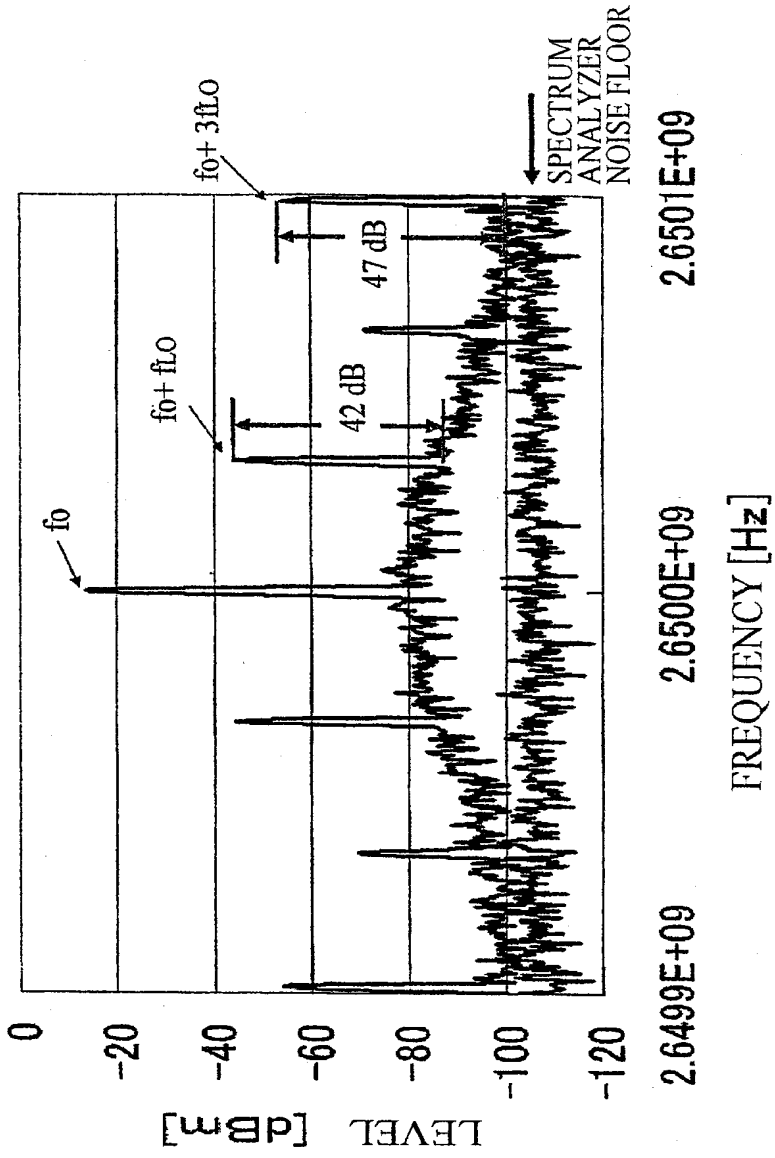
fo+ 3fLO
SPECTRUM
ANALYZER
NOISE FLOOR
47 dB
fo+ fLO
42 dB
fo
0
-20
-40
-60
-80
-100
-120
LEVEL [dBm]
2.6499E+09
2.6500E+09
2.6501E+09
FREQUENCY [Hz]

FIG. 16

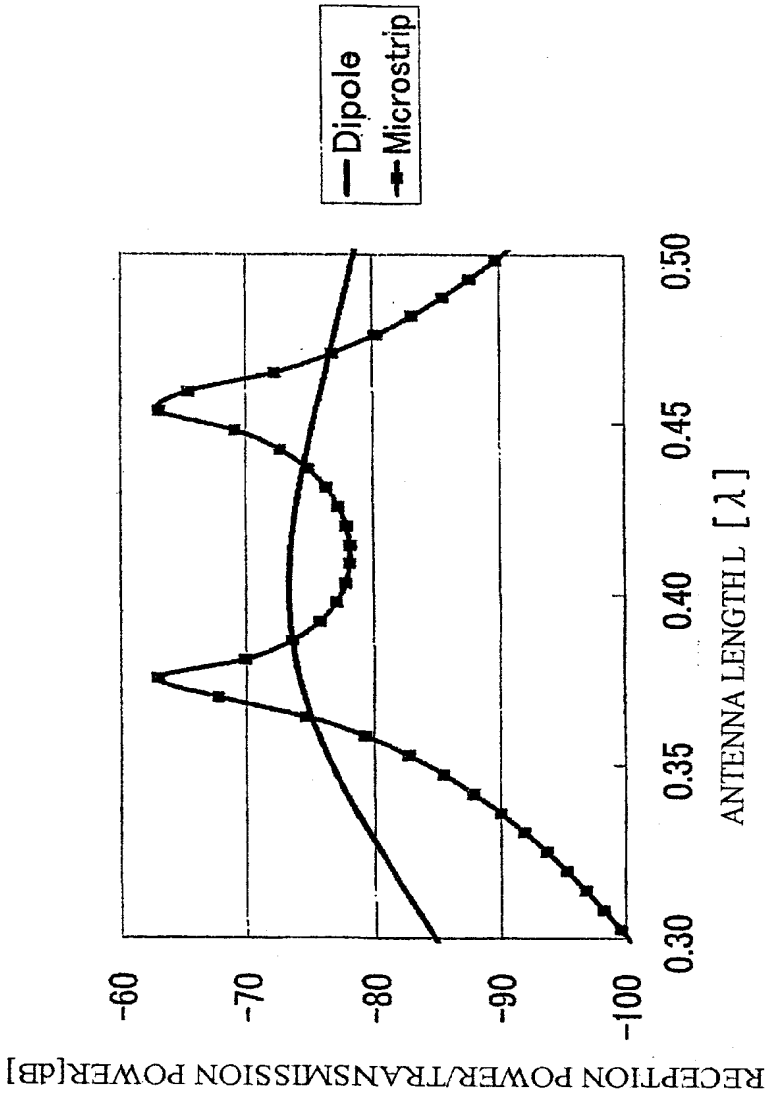
Dipole
Microstrip
-60
-70
-80
-90
-100
0.30
0.35
0.40
0.45
0.50
ANTENNA LENGTH L [λ]
RECEPTION POWER/TRANSMISSION POWER[dB]

FIG. 17

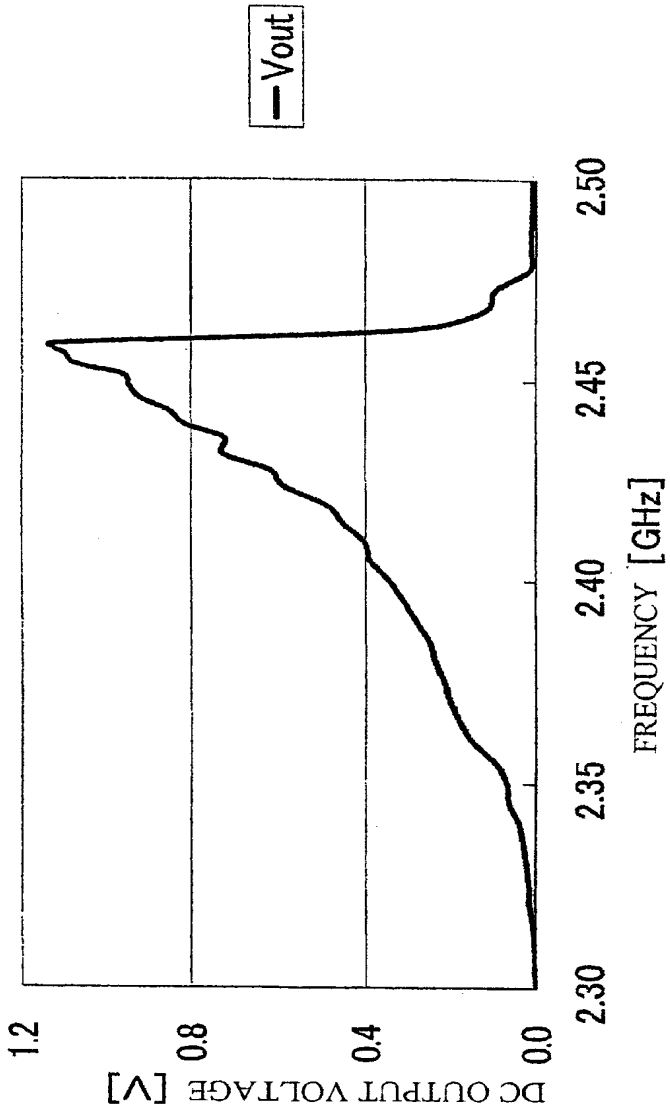
Vout
DC OUTPUT VOLTAGE [V]
1.2
0.8
0.4
0.0
2.30
2.35
2.40
2.45
2.50
FREQUENCY [GHz]

FIG. 18

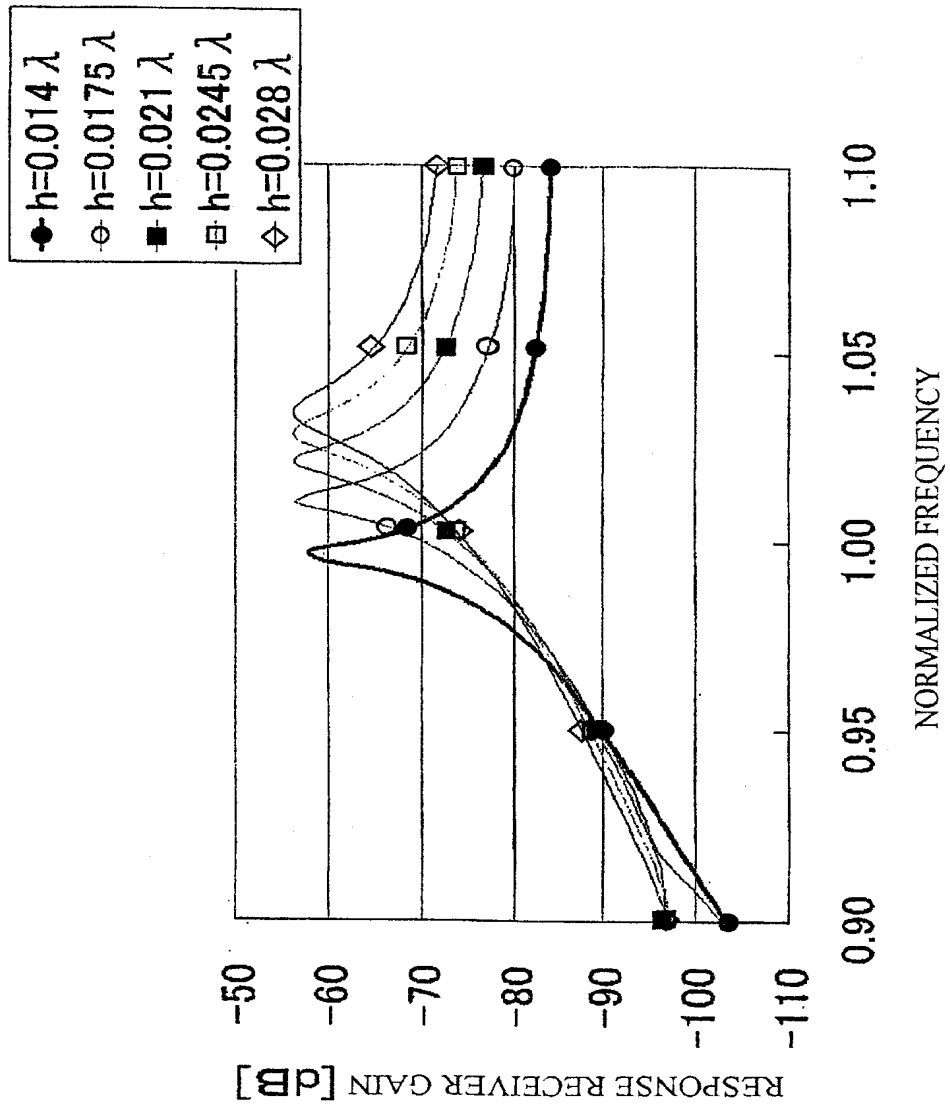
h=0.014 λ
h=0.0175 λ
h=0.021 λ
h=0.0245 λ
h=0.028 λ
RESPONSE RECEIVER GAIN [dB]
-50
-60
-70
-80
-90
-100
-110
0.90
0.95
1.00
1.05
1.10
NORMALIZED FREQUENCY

FIG. 19

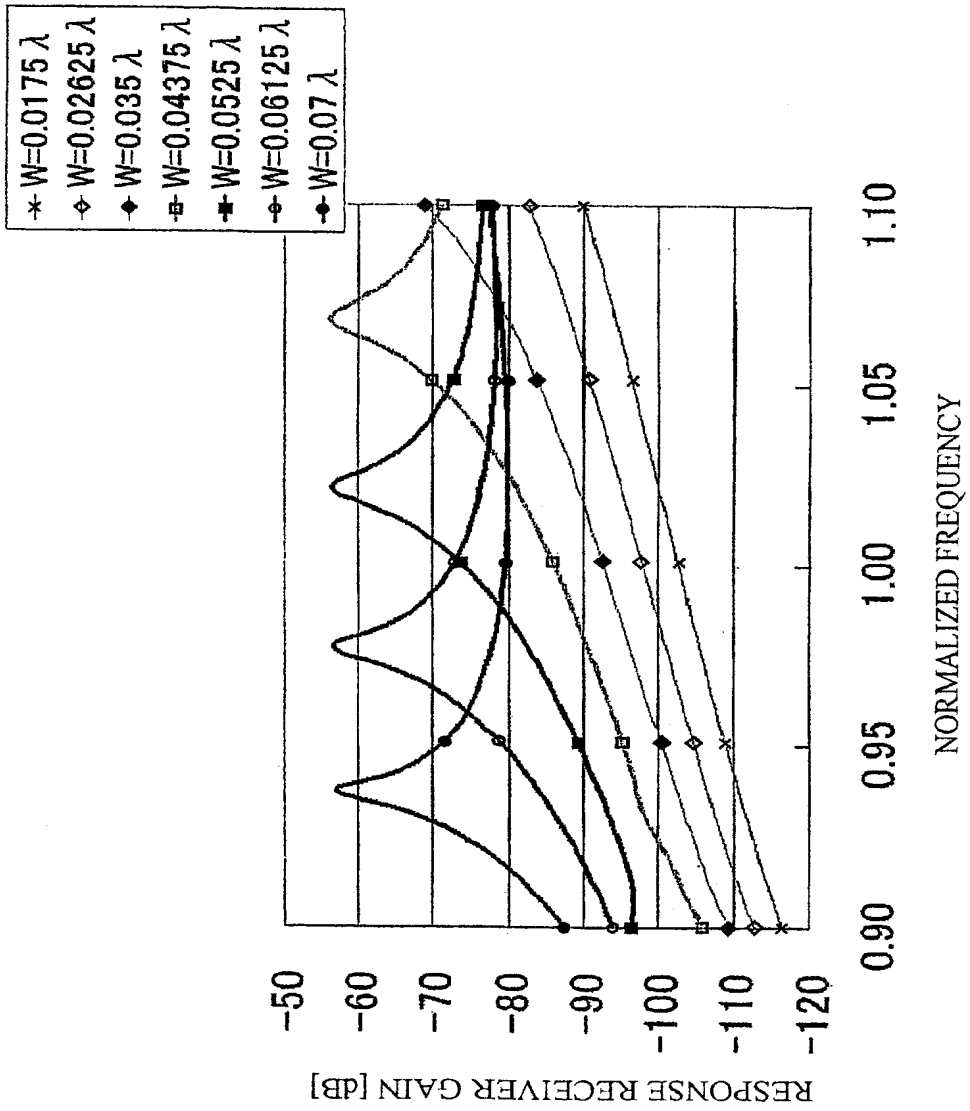
W=0.0175 λ
W=0.02625 λ
W=0.035 λ
W=0.04375 λ
W=0.0525 λ
W=0.06125 λ
W=0.07 λ
RESPONSE RECEIVER GAIN [dB]
-50
-60
-70
-80
-90
-100
-110
-120
0.90
0.95
1.00
1.05
1.10
NORMALIZED FREQUENCY

FIG. 20

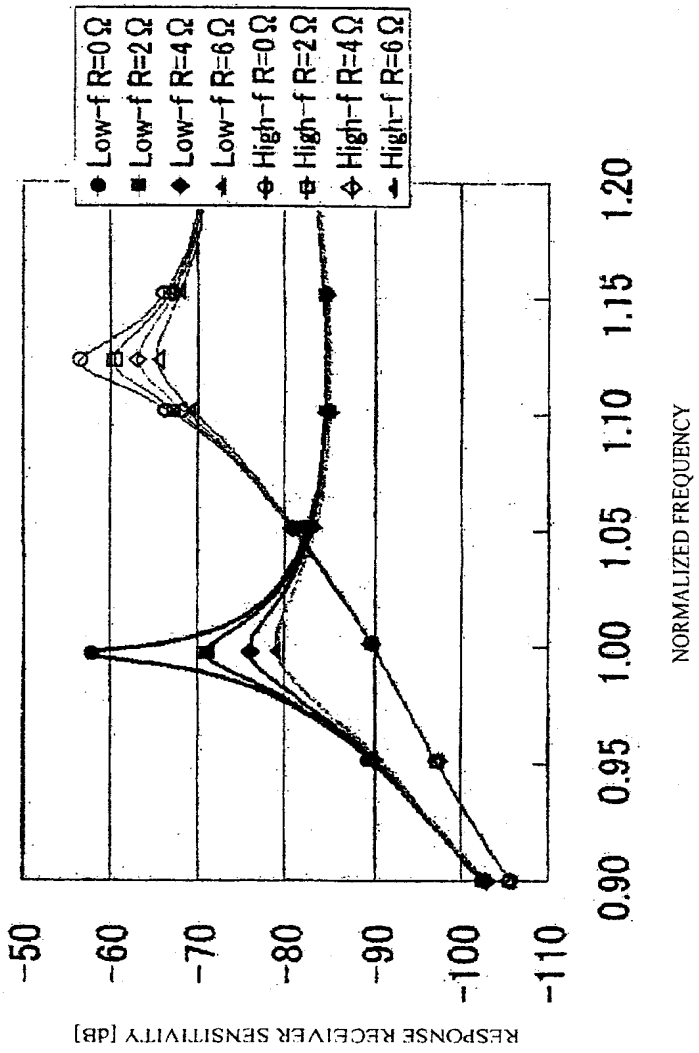
Low-f R=0Ω
Low-f R=2Ω
Low-f R=4Ω
Low-f R=6Ω
High-f R=0Ω
High-f R=2Ω
High-f R=4Ω
High-f R=6Ω
-50
-60
-70
-80
-90
-100
-110
RESPONSE RECEIVER SENSITIVITY [dB]
0.90
0.95
1.00
1.05
1.10
1.15
1.20
NORMALIZED FREQUENCY

FIG. 21

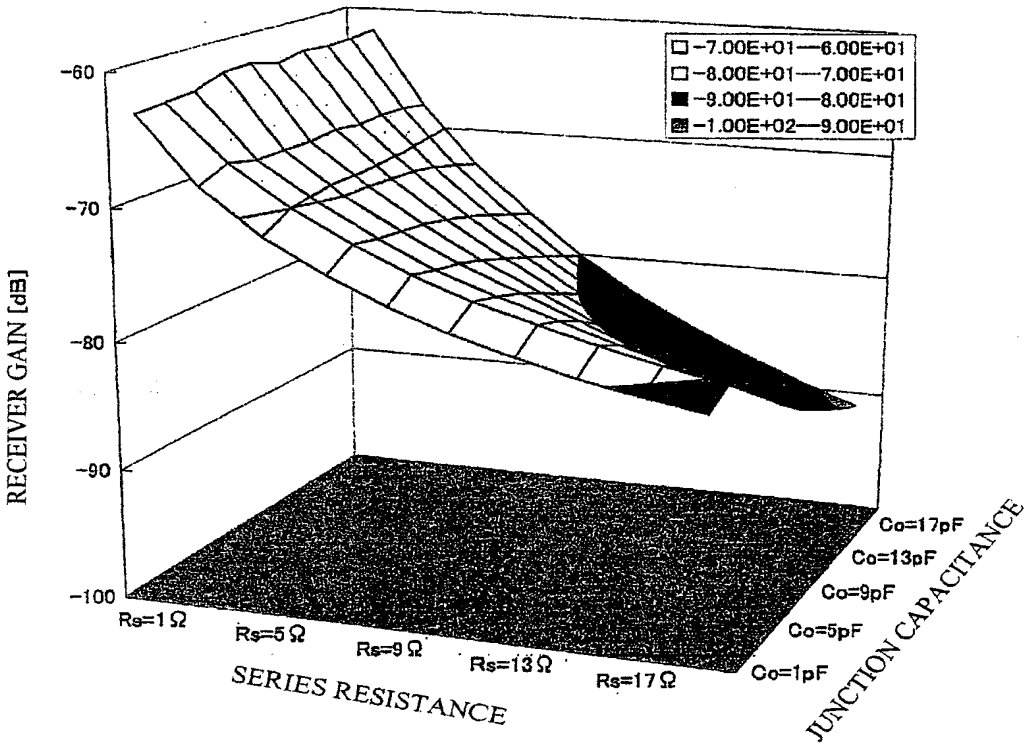
−7.00E+01—6.00E+01
−8.00E+01—7.00E+01
−9.00E+01—8.00E+01
−1.00E+02—9.00E+01
−60
−70
−80
−90
−100
RECEIVER GAIN [dB]
Rs=1Ω
Rs=5Ω
Rs=9Ω
Rs=13Ω
Rs=17Ω
SERIES RESISTANCE
Co=17pF
Co=13pF
Co=9pF
Co=5pF
Co=1pF
JUNCTION CAPACITANCE

FIG. 22

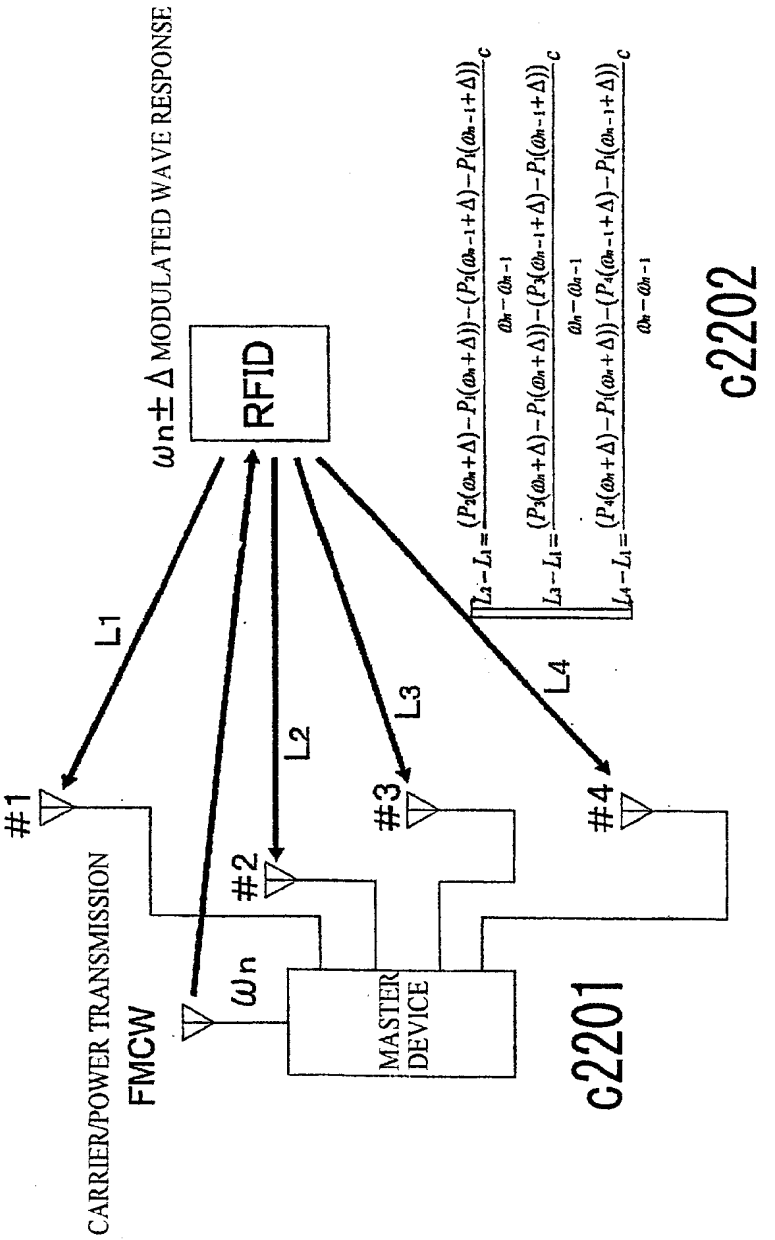
ωn± Δ MODULATED WAVE RESPONSE
RFID
L1
L2
L3
L4
#1
#2
#3
#4
CARRIER/POWER TRANSMISSION
FMCW
ωn
MASTER DEVICE
c2201
c2202

FIG. 23

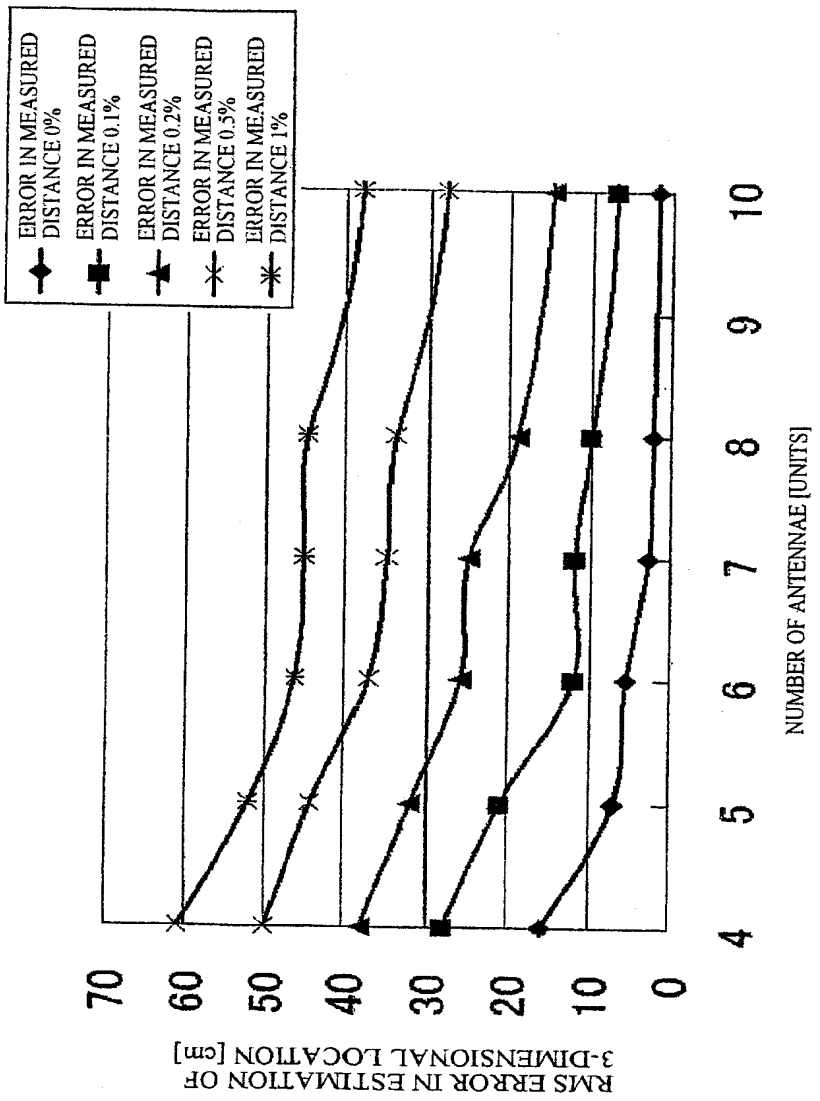
ERROR IN MEASURED DISTANCE 0%
ERROR IN MEASURED DISTANCE 0.1%
ERROR IN MEASURED DISTANCE 0.2%
ERROR IN MEASURED DISTANCE 0.5%
ERROR IN MEASURED DISTANCE 1%
RMS ERROR IN ESTIMATION OF 3-DIMENSIONAL LOCATION [cm]
70
60
50
40
30
20
10
0
4
5
6
7
8
9
10
NUMBER OF ANTENNAE [UNITS]

FIG. 24

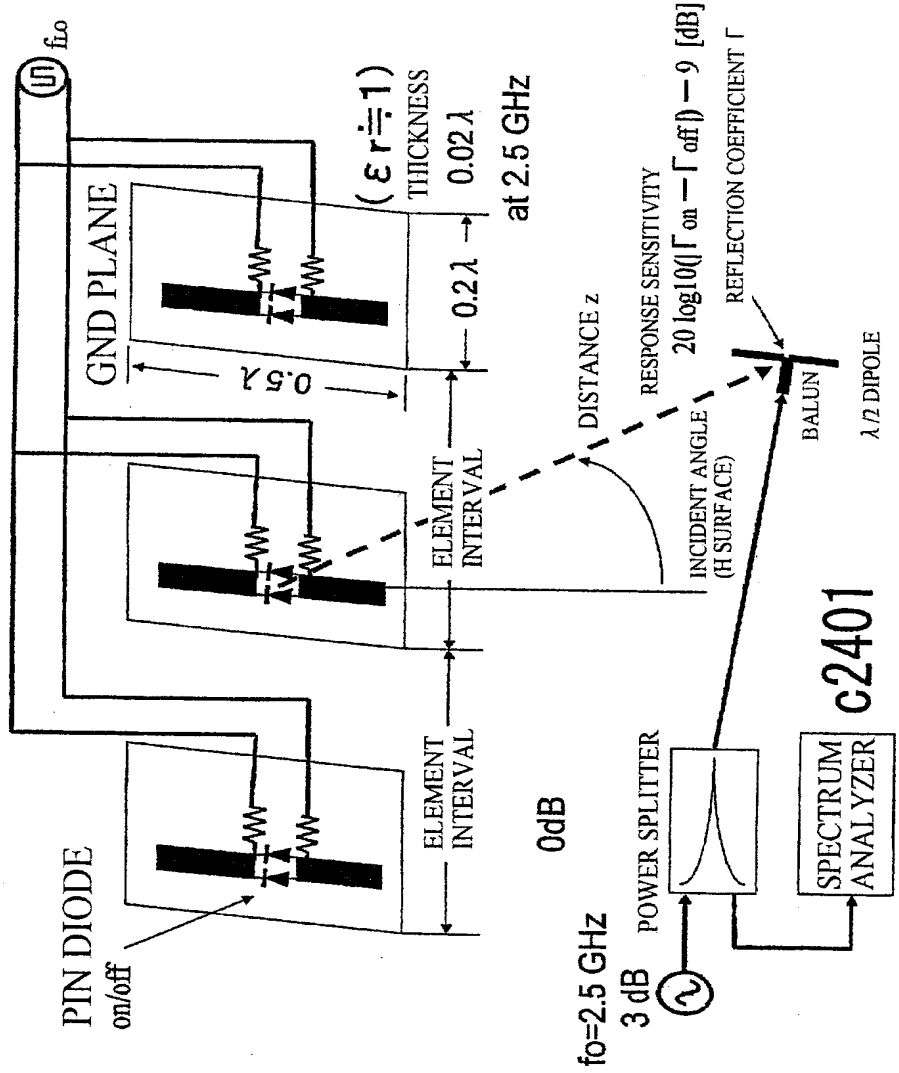
fLO
GND PLANE
0.5λ
(εr≒1)
THICKNESS
0.02λ
0.2λ
at 2.5 GHz
PIN DIODE
on/off
ELEMENT INTERVAL
ELEMENT INTERVAL
DISTANCE z
RESPONSE SENSITIVITY
20 log10(|Γ on − Γ off|) − 9 [dB]
REFLECTION COEFFICIENT Γ
INCIDENT ANGLE
(H SURFACE)
BALUN
λ/2 DIPOLE
0dB
fo=2.5 GHz
3 dB
POWER SPLITTER
SPECTRUM ANALYZER
c2401

FIG. 25

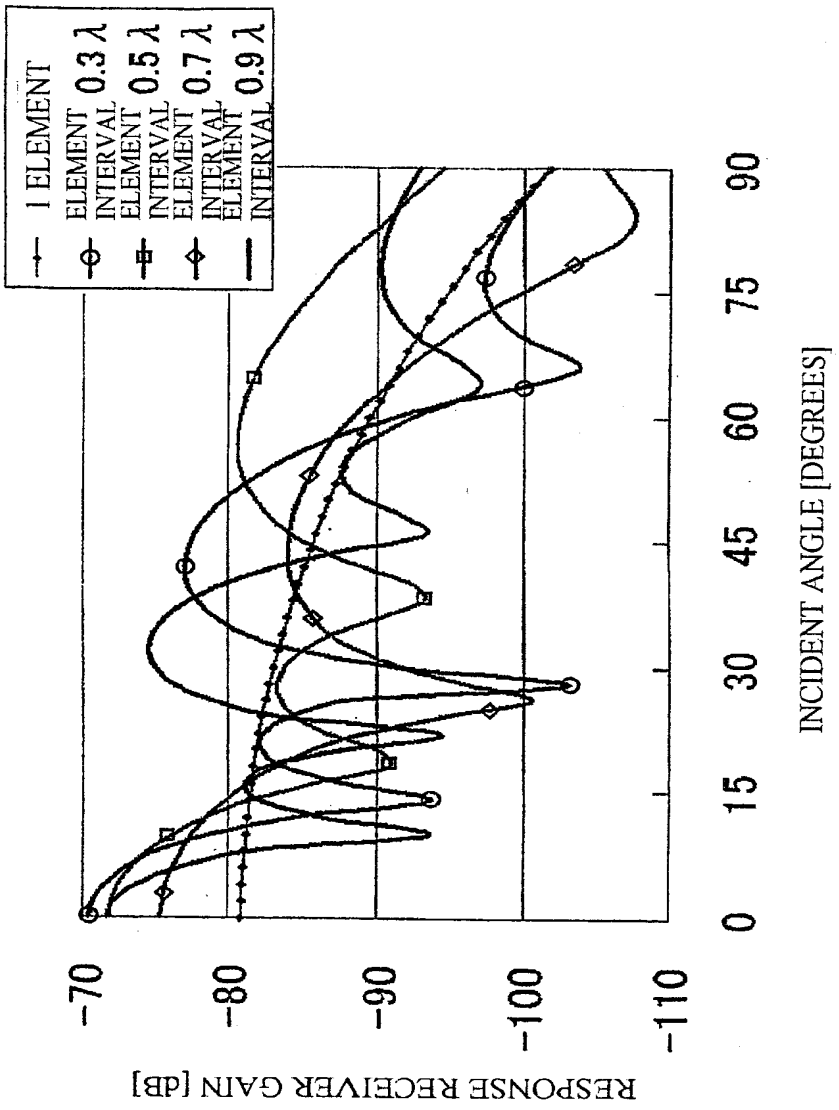
1 ELEMENT
ELEMENT
INTERVAL 0.3λ
ELEMENT
INTERVAL 0.5λ
ELEMENT
INTERVAL 0.7λ
ELEMENT
INTERVAL 0.9λ
-70
-80
-90
-100
-110
RESPONSE RECEIVER GAIN [dB]
0
15
30
45
60
75
90
INCIDENT ANGLE [DEGREES]

FIG. 26

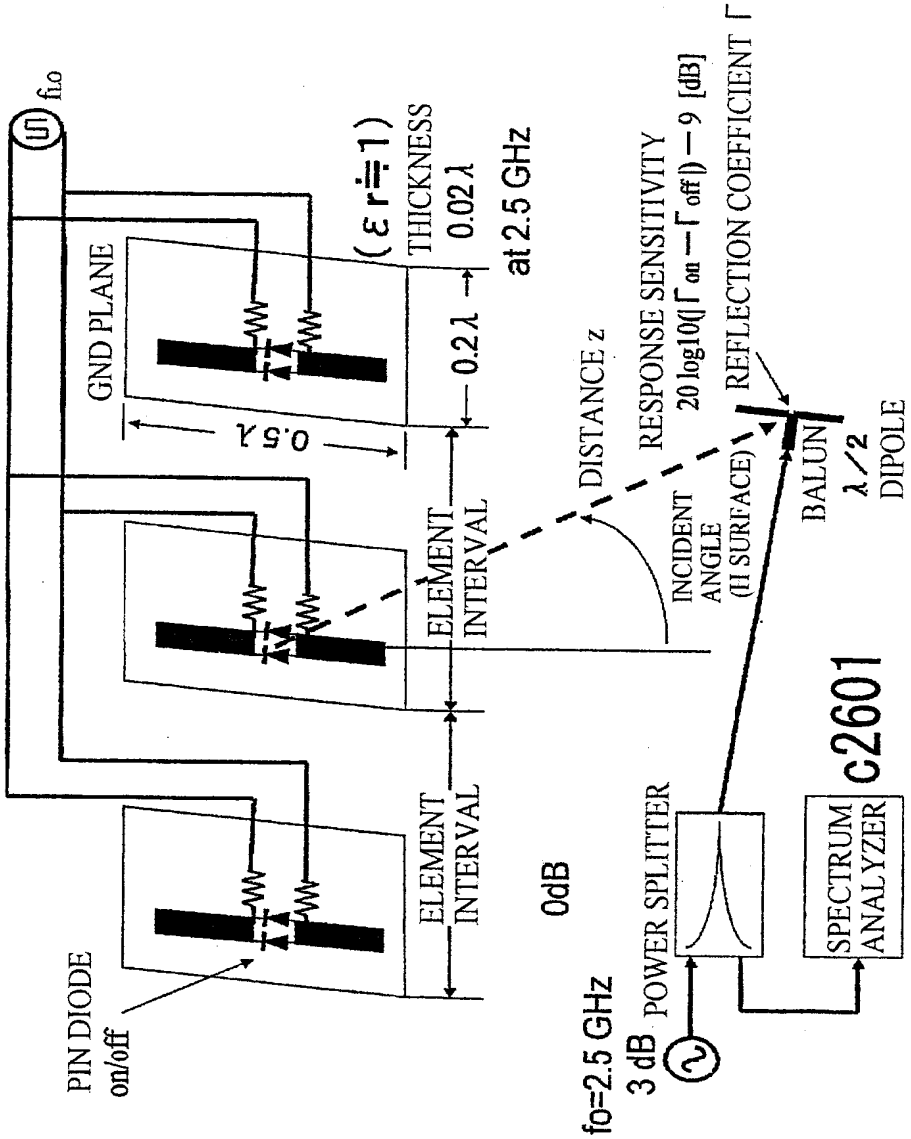
fLO
GND PLANE
0.5λ
(εr≒1)
THICKNESS
0.02λ
at 2.5 GHz
0.2λ
DISTANCE z
RESPONSE SENSITIVITY
20 log10(|Γon − Γoff|) − 9 [dB]
REFLECTION COEFFICIENT Γ
INCIDENT ANGLE (II SURFACE)
ELEMENT INTERVAL
ELEMENT INTERVAL
BALUN
λ/2 DIPOLE
PIN DIODE on/off
0dB
fo=2.5 GHz
3 dB
POWER SPLITTER
SPECTRUM ANALYZER
c2601

FIG. 27

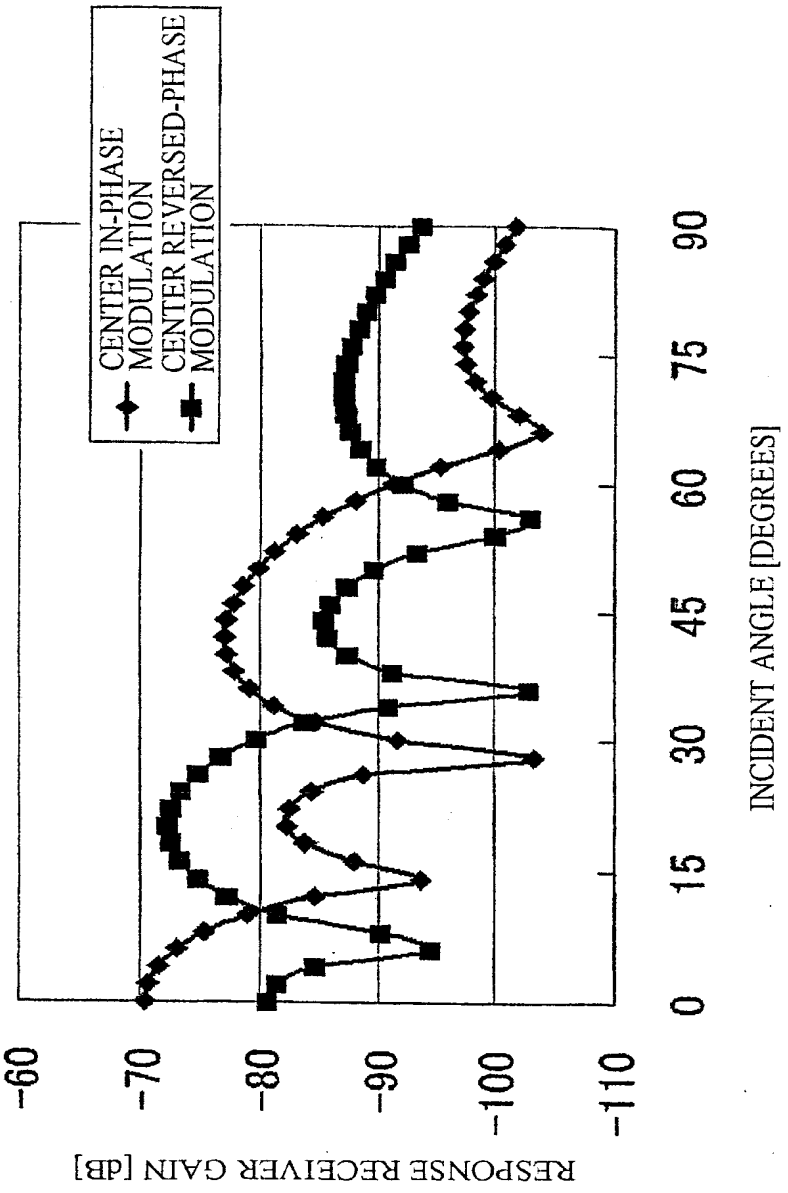
CENTER IN-PHASE MODULATION
CENTER REVERSED-PHASE MODULATION
RESPONSE RECEIVER GAIN [dB]
-60
-70
-80
-90
-100
-110
0
15
30
45
60
75
90
INCIDENT ANGLE [DEGREES]

FIG. 28

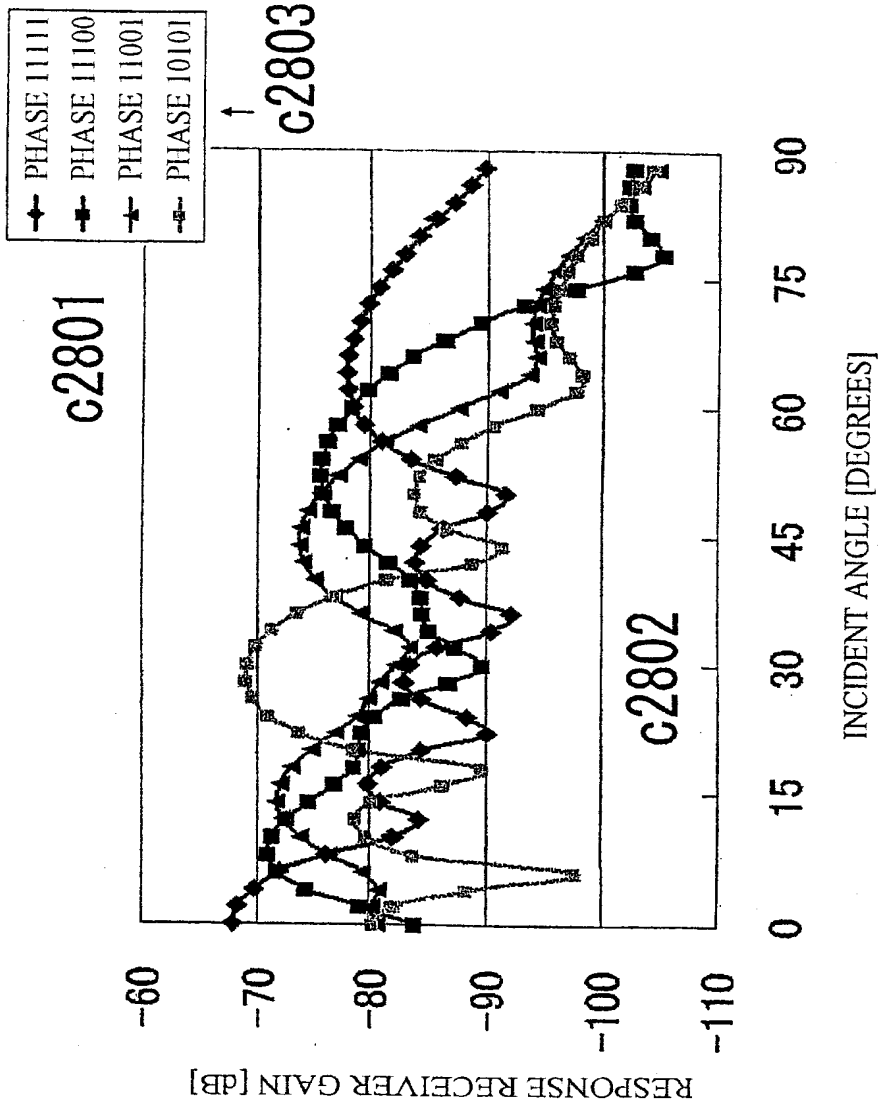
PHASE 11111
PHASE 11100
PHASE 11001
PHASE 10101
c2801
c2802
c2803
-60
-70
-80
-90
-100
-110
0
15
30
45
60
75
90
RESPONSE RECEIVER GAIN [dB]
INCIDENT ANGLE [DEGREES]

FIG.29

```
real*4 ep(5),x(5),y(5),z(5),xs(5),ys(5),zs(5)
real*4 al(200),bl(200),cl(201)

iij=1234556
f0=0.05
dlh=15.0/f0      ! cm ](1)
na=16
write(*,10)
format(' Enter the location of x,y,z (cm) : '$)  (2)
read(*,*,end=90) xp,yp,zp

call marray(xp,yp,zp,na,cl)  (3)
do i=2,na+1
    verr=ran(iij)
    al(i-1)=cl(i)*(1.0+(verr-0.5)*0.001)-cl(1)  ! noise 0.1 % ](4)
end do
write(*,*)   ⊿L(cm)',(al(i),i=1,na)
write(*,*)

call mcycle(na,dlh,al)  (5)

do i=1,5
    ep(i)=1.0e20
end do

do ix=-30,30                    ]
    xp=float(ix)*10.0           ]
    do iy=-30,30                ] (6)
        yp=float(iy)*10.0       ]
        do iz=-30,30            ]
            zp=float(iz)*10.0   ]

            call marray(xp,yp,zp,na,cl)  (7)
            do i=2,na+1
                bl(i-1)=cl(i)-cl(1)-al(i-1)  (8)
            end do

            call mcycle(na,dlh,bl)  (9)
            er=0.0
            do i=1,na
                er=er+bl(i)**2   (10)
            end do
            do i=1,5                        ]
                if (er .lt. ep(i)) then     ]
                    if (i .ne. 5) then      ]
                        do j=5,i+1,-1       ]
                            ep(j)=ep(j-1)   ]
                            x(j)=x(j-1)     ]
                            y(j)=y(j-1)     ]
                            z(j)=z(j-1)     ] (11)
                        end do              ]
                    end if                  ]
                    ep(i)=er                ]
                    x(i)=xp                 ]
                    y(i)=yp                 ]
                    z(i)=zp                 ]
                go to 30                    ]
```

FIG.30

```
                end if
            end do
            continue
        end do
    end do
end do

do i=1,5
    xs(i)=x(i)
    ys(i)=y(i)
    zs(i)=z(i)
end do

write(*,*) ' RMS error (cm)        x              y              z   (12)
do i=1,5
    write(*,*) sqrt(ep(i)/float(na)),x(i),y(i),z(i)
end do

do m=1,5                                                              (13)
    x0=xs(m)
    y0=ys(m)
    z0=zs(m)
do ix=-15,15
    xp=float(ix)+x0
    do iy=-15,15
        yp=float(iy)+y0
        do iz=-15,15
            zp=float(iz)+z0

            call marray(xp,yp,zp,na,cl)
            do i=2,na+1
                bl(i-1)=cl(i)-cl(1)-al(i-1)
            end do

            call mcycle(na,dlh,bl)
            er=0.0
            do i=1,na
                er=er+bl(i)**2
            end do

            do i=1,5
                if (er .lt. ep(i)) then
                    if (i .ne. 5) then
                        do j=5,i+1,-1
                            ep(j)=ep(j-1)
                            x(j)=x(j-1)
                            y(j)=y(j-1)
                            z(j)=z(j-1)
                        end do
                    end if
                        ep(i)=er
                        x(i)=xp
                        y(i)=yp
                        z(i)=zp
                    go to 35
                end if
            end do
```

FIG.31

```
            continue
        end do
    end do
end do

end do
write(*,*)
write(*,*) sqrt(ep(1)/float(na)),x(1),y(1),z(1)   (14)

write(*,*)
go to 20

stop
end

subroutine marray(xp,yp,zp,na,cl)

real*4 cl(1)

cl(1)=sqrt(xp*xp+yp*yp+(zp+50.0)**2)
do i=2,na+1
    ixx=i/3
    iyy=i-ixx*3
    xm=float(ixx-1)*50.0-10.0
    ym=float(iyy-1)*50.0+10.0
    cl(i)=sqrt((xp-xm)**2+(yp-ym)**2+zp*zp)
end do

return
end

subroutine mcycle(na,dlh,al)

real*4 al(1)

do i=1,na
    continue
    if (al(i) .gt. dlh) then
        al(i)=al(i)-dlh
        if (al(i) .le. dlh) go to 46
        go to 40
    end if
    continue
    if (al(i) .lt. -dlh) then
        al(i)=al(i)+dlh
        if (al(i) .ge. -dlh) go to 46
        go to 45
    end if
    continue
end do

return
end
```

FIG.32

```
Enter the location of x,y,z (cm) : 152,-203,56
 ⊿L(cm)    67.67562       -38.21133       -1.487458        39.09471
-69.24731      -27.88023       16.30007       -91.74537      -46.11990
 0.9732714     -102.0754      -54.30361       -5.570741      -98.28325
-51.46763      -3.269386

 RMS error (cm)          x               y               z
 0.6834297       150.0000       -200.0000       60.00000
 0.8562734       150.0000       -190.0000       50.00000
  1.116775       150.0000       -200.0000       50.00000
  1.163736       160.0000       -230.0000       70.00000
  1.216863       160.0000       -220.0000       60.00000

 8.4395386E-02   152.0000       -203.0000       56.00000

Enter the location of x,y,z (cm) : 22,123,-89
 ⊿L(cm)    5.506481       57.46710       16.50204       -17.27929
  55.74849       14.06553       -20.41722       66.89948       28.19106
 -2.332703       89.04320       55.22502       29.83902       119.4193
  90.37129       69.39222

 RMS error (cm)          x               y               z
  1.445567       20.00000       130.0000       -90.00000
  1.754374       20.00000       130.0000       -100.0000
  1.951296       20.00000       120.0000       -80.00000
  2.345274       20.00000       120.0000       -90.00000
  2.709345       20.00000       140.0000       -100.0000

 6.2024966E-02   22.00000       123.0000       -89.00000

Enter the location of x,y,z (cm) : 60,161,5
 ⊿L(cm)   -23.45399       32.54938       -13.85323       -57.41031
  21.66080      -27.96993       -77.36571       22.85288       -26.38201
 -74.96463       36.05470       -9.367880       -51.50449       59.00156
  18.86572      -15.62937

 RMS error (cm)          x               y               z
  1.358104       60.00000       160.0000       10.00000
  1.400364       60.00000       160.0000       0.0000000E+00
  1.561480       60.00000       170.0000       0.0000000E+00
  1.779230       60.00000       170.0000       10.00000
  1.850774       60.00000       150.0000       10.00000

 4.4650473E-02   60.00000       161.0000       5.000000

Enter the location of x,y,z (cm)
```